




# TECHNICAL DATA

TANDEM ROLLERS

BW 135 AD-5, BW 138 AD-5



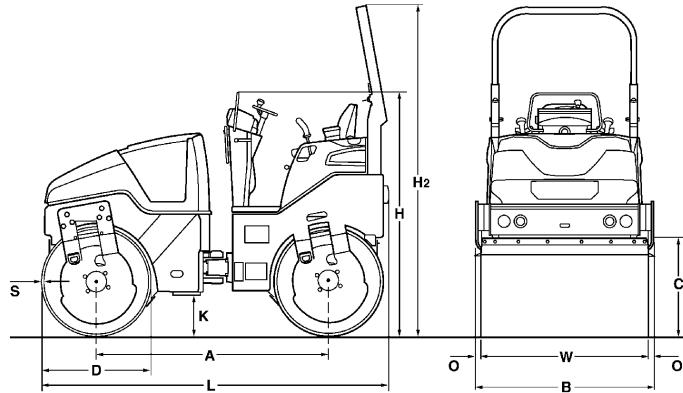

### Dimensions in mm

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>H</b>	<b>H2</b>	<b>K</b>	<b>L</b>	<b>O</b>	<b>S</b>	<b>W</b>
<b>BW 135 AD-5</b>	1900	1390	700	900	1900	2700	340	2840	44	16	1300
<b>BW 138 AD-5</b>	1900	1470	700	900	1900	2700	340	2840	44	18	1380

### Shipping dimensions in m<sup>3</sup>

	<b>without ROPS</b>	<b>with ROPS</b>
<b>BW 135 AD-5</b>	7,500	10,659
<b>BW 138 AD-5</b>	7,932	11,272

<b>Machine type</b>	<b>Compaction output (m<sup>3</sup>/h) at recommended soil layer thicknesses</b>		
	<b>Gravel, sand</b>	<b>Mixed soil</b>	<b>Silt, clay</b>
<b>BW 135 AD-5</b>	90-180	70-140	40-80
<b>BW 138 AD-5</b>	100-200	80-160	40-80

<b>Machine type</b>	<b>Compaction output (t/h) at different asphalt layer thicknesses</b>		
	<b>2-4 cm</b>	<b>6-8 cm</b>	<b>10-14 cm</b>
<b>BW 135 AD-5</b>	30-55	50-85	75-130
<b>BW 138 AD-5</b>	30-55	50-90	75-135

<b>Technical Data</b>	<b>BOMAG</b> <b>BW 135 AD-5</b>	<b>BOMAG</b> <b>BW 138 AD-5</b>
<b>Weights</b>		
Operating weight w. ROPS CECE .....	kg	3.900
Average static linear load CECE .....	kg/cm	15,0
Grossweight .....	kg	4.200
<b>Dimensions</b>		
Working width .....	mm	1.300
Track radius, inner .....	mm	2.665
<b>Driving Characteristics</b>		
Speed .....	km/h	0- 10,0
Working speed with vibration .....	km/h	0- 10,0
Max. gradeability without/with vibr. .....	%	40/30
<b>Drive</b>		
Engine manufacturer .....		Kubota
Type .....		V 2203
Emission stage .....		3a/4i
Cooling .....		water
Number of cylinders .....		4
Performance ISO 14396 .....	kW	33,3
Performance SAE J 1995 .....	hp	45,3
Speed .....	min-1	2.600
Speed adjustment 1 .....	min-1	2.300
Speed adjustment 2 .....	min-1	2.600
Electric equipment .....	V	12
Driven drum .....		front + rear
<b>Brakes</b>		
Service brake .....		hydrost.
Parking brake .....		hydromec.
<b>Steering</b>		
Steering system .....		oscil.artic.
Steering method .....		hydrost.
Steering / oscillating angle +/- .....	grad	32/10
Crab walk .....		0- 50
<b>Exciter system</b>		
Vibrating drum .....		front + rear
Drive system .....		hydrost.
Frequency .....	Hz	50/56
Amplitude .....	mm	0,50
Centrifugal force .....	kN	38/48
<b>Sprinkler System</b>		
Type of sprinkling .....		pressure
<b>Capacities</b>		
Fuel .....	l	55,0
Water .....	l	310,0

Technical modifications reserved. Machines may be shown with options.

### **Standard Equipment**

- Hydrostatic travel and vibration drive
- Pressure sprinkler system with interval switch
- 2 scrapers per drum, spring loaded and tiltable
- Multi function travel lever
- Multi-function display incl. operating hour meter
- Water level
- electronic fuel gauge
- Emergency STOP
- Individual control, vibration
- Intelligent Vibration Control (IVC)
- Integrated stowage compartment
- Lashing eyes, galvanized
- Back-up alarm
- Single point lifting device
- Vandalism protection
- Lockable engine hood made of composite material
- Working lights front and rear
- 12V socket
- Seat contact switch
- Sliding seat incl. double travel lever

### **Optional Equipment**

- \*Foldable ROPS incl. seat belt
- Edge cutter-right/left
- Gravel scatterer
- Battery disconnect switch
- Indicator and hazard lights
- Rotary beacon
- Optional lighting on ROPS
- Sun roof, rigid
- Sun roof, foldable with ROPS
- Weather protection for sun roof
- Special painting
- Seat heating
- Backup warning buzzer with broadband technology
- Environmentally compliant hydraulic oil
- Theft protection
- Flow divider
- BOMAG TELEMATIC
- ECONOMIZER
- Asphalt temperature display

\* Standard delivery with CE conformity  
(valid within European Union)

